


BOSS Oily Water Separators


CERTIFIED
to latest
IMO MEPC 107(49)

STANDARD 107 MODELS

For Ships 4000-15000GT
BOSS 11T/107(2.5 m3/hr)

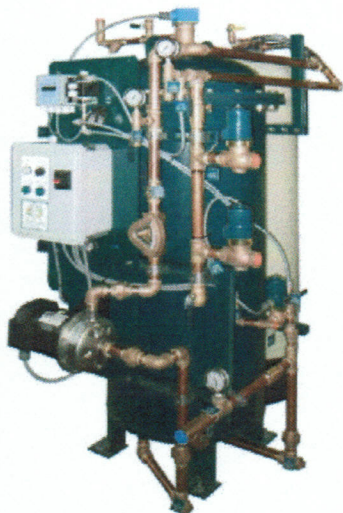

For Ships 1600-4000GT
BOSS 5T/107(1.1 m3/hr)

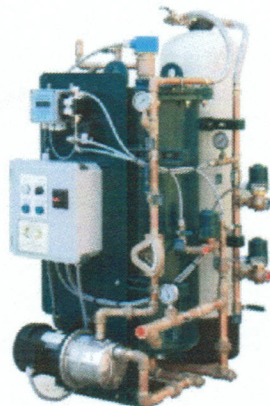

For Ships 400-1600GT
BOSS 2.2T/107 (0.5 m3/hr)



For Ships 15000GT+
BOSS 25T/107(5.7 m3/hr)



For Rigs & Large Ships
BOSS 45T/107(10.2 m3/hr)

SIMPLE & SOLID

SIMPLE COST

SIMPLE DESIGN

SIMPLE INSTALLATION

SIMPLE OPERATION

SIMPLE MAINTENANCE

SIMPLE RELIABILITY

SIMPLE EFFICIENCY

SIMPLE FILTRATION

BOSS Oil Water Separators - Specification Sheet 107(49)

Specifications	2.2 GPM	5 GPM	11 GPM	25 GPM	45 GPM
Height (inch/cm)	50 (127)	56 (142)	69 (175)	72 (183)	75 (191)
Width (inch/cm)	27 (69)	28 (71)	36 (91)	41 (104)	54 (137)
Depth (inch/cm)	40 (102)	49 (124)	56 (142)	78 (198)	99 (252)
Dry Weight (lbs./kilogram)	450 (204)	725 (329)	1250 (568)	2610 (1184)	3550 (1610)
Wet Weight (lbs./kilogram)	630 (286)	1165 (528)	2220 (1007)	4950 (2245)	7870 (3570)
Capacity gpm/ M ³ /hr	2.2(0.5)	5 (1.1)	11(2.5)	25(5.7)	45(10.2)
Pipe connections In/Out	¾" – ¾"	1" – ¾"	1 ½" – 1"	1 ½" - 1 ½"	2" – 1 ½"

ALL UNITS

Specifications	Value	Advantage
IMO MEPC Compliance	107(49)	Meets Latest Requirement
Expected Oil in Discharge Water(independent tests)	Less than 3.2 PPM	Far exceeds the required 15ppm Great for the environment
Emulsion Removal Method	High Capacity Filtration	Simpler/more trouble free than membranes
Expected Filtration Media Life	1 year	Extra long lasting without bypassing
Water Discharge Pressure	90Ft of Head	Designed for any situation
Oil Discharge Pressure	Makeup Water Pressure	Determined by makeup water
Oil Discharge Valve	Standard Check Valve	Optional MOV where Negative Head
Control System Type	Solid Circuit	Increased reliability – No PLC trouble
Control System Interface	6 dry contacts	Easy to interface with ship controls
Test PSIG	45	Quality Construction
Operating Temp Range	1-55 C	Generally not affected by temperature
Max Free Oil Concentration	35%	Large temporary slugs of oil up to 100%
Oil in Water Discharge with TPH	<15 ppm	Can be set to 1-15ppm
Single Phase Power Options	110/120vac 220vac	Any power option 1 phase
Three Phase Power Options	210/220vac 380/415vac 460/480vac 575/600vac	3 phase options to 600VAC
Frequency	50 or 60 Hz	Either frequency no problem
Max Amperage	3.3-7.7 amps	Recommend 15 amp circuit
Max Turbidity for Accurate TPH Reading	35 NTU standard	High Turbidity Options Available
Design Negative Inlet Head (Ft/M)	12 ft./ 3 M	High Lift 5 Meter Option Available
Level Sensor	Conductance	Highly Reliable- Trouble Free
Pump	Centrifugal w SS Housing	Highly Reliable - No emulsions created pump on the discharge side of separator
Coalescing Media	Polypropylene / HDPE	Excellent Coalescing - Very Efficient
Vessel Metallurgy	Carbon Steel	Marine Coated
Coating Specification	Epoxy/Urethane	Highest Quality Coating
Skid / Drip Pan	Standard without skid	Skid or Drip Pan Optional
Piping and Manual Valves	Bronze / Red Brass	Excellent

- NOTES:** 1- Custom designs are available to vary specifications including hazardous area options
2- Combinations of specs may have pricing implications



144 Intracoastal Dr.
Houma, LA 70363
Toll Free: 866-218-0013
Fax: 985-346-0244

info@separatorequipment.com
www.separatorequipment.com